


4 Port Video Mini-Hub

11/08

PRODUCT SPECIFICATION

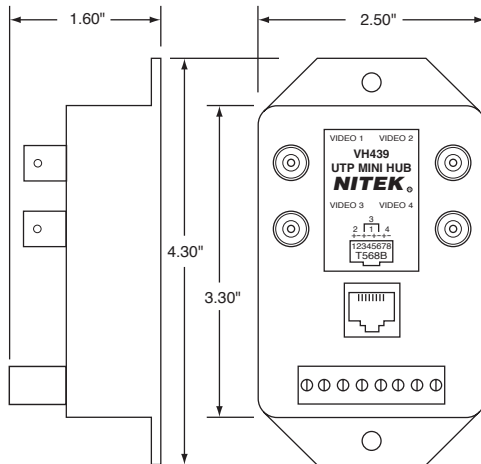

Description

The **VH439** video balun mini-hub is a multi-channel video transmission device that provides a low cost means of sending quality video over Category cabling. The system can also adapt to existing communication and computer network spare pairs. The VH439 can send video up to 750 feet when used with other products in the VB37 or VB39 family. When used with model TR515 or TR560 active receivers, distances of 1,500 feet and 3,000 feet, respectively can be attained. The VH439 is designed to provide superior immunity from noise and interference, such as RFI and EMI.

Features

- Quality video over ordinary twisted pair
- Built-in protection from power surges and transients
- Immunity to noise and interference
- Passive units—require no power
- Video & P/T/Z over a single pair with “up-the-coax” systems
- Highly compact, wall-mounted unit
- RJ45 modular jack or screw terminals for easy connection when used with other passive baluns
- Video can be run in the same cable with telephone, computer signals and power

REV. 02182025

USA OFFICE:

729 1ST AVE N. BIRMINGHAM, AL 35203

PHONE : (847) 259-8900

E-MAIL: INFO@NITEK.NET • WEB:NITEK.NET

TECHNICAL SPECIFICATION

VH439—4 Port Video Balun Mini-Hub

Size	1.6" H x 4.3" W x 2.5" D
Input	1 Vpp composite video Monochrome or Color
Video Format	PAL, SECAM, NTSC, RS170, CCIR (Color or B/W)
Twisted Pair Connection	Screw terminals or RJ45 modular connector
Wire Spec	26 to 18 AWG twisted pair
DC Loop Resistance	51 Ohms/1,000 feet
Nominal Capacitance	17pF/ft
Impedance	100 Ohms +/- 20%
Category Wire	2 or better
Common Mode Rejection	>70dB
Operating Frequency	DC to 10 MHz
Recommended Transmission Distance	w/passive units—750 feet w/active units—3,000 feet
Transient Immunity	Built-in
Shipping Weight	1 lb

Wire and Cable Recommendations

We recommend using unshielded twisted pair wiring. The systems will operate over wire 26 to 18 AWG but are optimized for 24 AWG. Category cables may be used. Individually shielded pairs should be avoided, as they drastically reduce the operating range of the systems. Multi-pair cable with an overall shield is acceptable. Video can be operated in the same communication cable coexistent with telephone, computer, control signals, power voltages and other video signals. While video may be routed through telephone punch down block terminals, any bridge-taps, also called T-taps and any resistive, capacitive or inductive devices **MUST BE** removed from the pair.

PIN	RJ45 KEY
1	VIDEO 2 +
2	VIDEO 2 -
3	VIDEO 3 +
4	VIDEO 1 -
5	VIDEO 1 +
6	VIDEO 3 -
7	VIDEO 4 +
8	VIDEO 4 -

