


## 8-Channel IP Over Coax rack-mounted receiver. Requires: ET1243C Transmitter.

The ER8200C is an 8-channel headend receiver, designed for Ethernet link extension over existing coaxial cabling. The ER8200C can extend 100Mbps Ethernet to remote transmitters up to 350m of RG-59 or RG-6 coaxial cabling. The ER8200C is designed to work with commercially available PoE Ethernet Switches to pass PoE Power through to the devices. Unlike the ER8500C, the ER8200C contains only a small 15V power supply, no internal web server, and no internal switch or aggregating LAN port.

Each EtherStretch Lyte channel is designed to allow the Ethernet PoE Switch to negotiate with the remote PoE device through the ER8200C receiver channel, ET1243C transmitter and coaxial cabling. Once the PoE comes up, the ER8200C channel and far-end transmitter also power up and begin link operations. The 15VDC supply is available for channels to operate without PoE power, but remote devices on those channels will have to be powered at the far end.

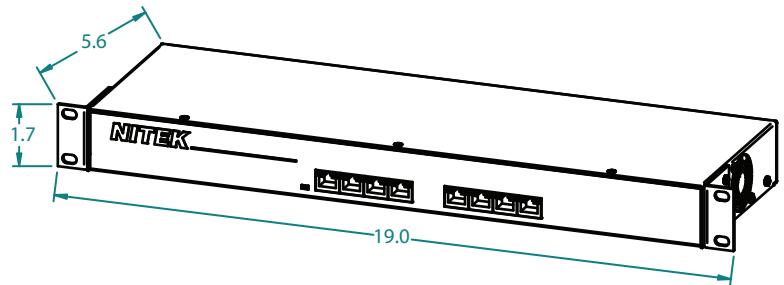

## PRODUCT FEATURES

- Transmits IP data & PoE up to distances of 350 meters (1150 feet)
- Can be used in combination with existing PoE network switch
- Includes 15V power supply for non-PoE links
- Fully transparent to the network, no MAC or IP addressing required
- LED indicators for power, link status and PoE output
- 8-port, 19" DIN Rack Mountable
- Supports IEEE802.3at (25.5W) and IEEE802.3af (15.4W)
- Surge protected inputs
- Easy to set up and install
- Limited Lifetime Warranty
- Designed, tested, manufactured and supported in the U.S.A.

## TECHNICAL SPECIFICATIONS

### Max Operating Distance

Network Ports: 100m  
Link Ports (over Coax):350m (1150ft)

### Power

Requirements: 110-240VAC/50-60HZ 3A Max  
Output: 15V Power Supply approx 3W per channel

### LED Connectivity Indicators

Link Activity  
PoE Power in  
Power to Transmitter Status

### System Latency

System Latency: <1mS over 350m RG-59

### Mechanical Dimensions (W x H x L)

483mm x 152mm x 43mm / 19" x 6.0" x 1.7"  
Rack mounting: 1RU x 6.0" D (including tabs and BNCs)

### Shipping Dimensions (W x H x L)

Package: 254mm x 152mm x 508mm /10" x 6" x 20"  
Weight: 3.17kg / 7lbs

### Environmental/Temperature

Operating: 0°C to 50°C / 32°F to 122°F  
Storage: -40°C to 75°C / -40°F to 167°F  
Humidity: Up to 90% non-condensing

### Connectors

Network Ports: (8) RJ45 Connector  
Link Ports: (8) BNC Coax Jack

### Rating / Listing

UL: IEC/UL 60950-1

REV. 04232026

### USA OFFICE:

729 1ST AVE N. BIRMINGHAM, AL 35203  
PHONE : (847) 259-8900  
E-MAIL:INFO@NITEK.NET • WEB:NITEK.NET